



# X-Band Receive Reject Filter


## Model 16602

This uplink (transmit) filter offers very low loss, very high downlink band suppression and it's WR137 construction makes it ideal for transmitting at higher power levels.



### Specifications:

Passband:	7.9 - 8.4 GHz
Insertion Loss:	0.2 dB Typ
VSWR:	1:15:1 Typ
Rejection Band:	7.25 - 7.75 GHz
Rejection:	90 dB Min
Power:	0.5 KW
Flanges:	CPR137G
Weight:	5.6 lbs (2.5 Kg)
Dimensions:	24.03" x 2.69" x 4.75" (610mm x 68mm x 121mm)
Finish:	Flat Black Lacquer

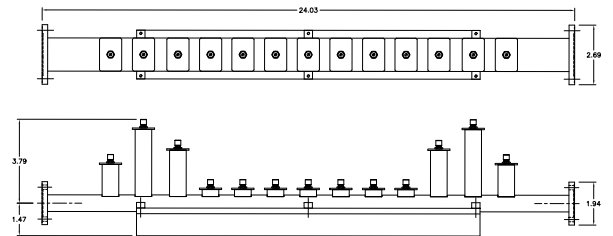

**MICROWAVE FILTER CO., INC.**  
6743 KINNE STREET, E. SYRACUSE, NY 13057  
E-Mail: [mfcsales@microwavefilter.com](mailto:mfcsales@microwavefilter.com)

800-448-1666 • 315-438-4700  
Web: [www.microwavefilter.com](http://www.microwavefilter.com)