




X-Band Receive Reject Filter

Model 16605 Series

This versatile uplink filter not only isolates transmission from the (lower frequency) downlink band, it's bandpass design also provides suppression above the transmit band to 10 GHz.

Specifications:

Passband:	7.9 - 8.4 GHz
Insertion Loss:	0.55 dB Typ
VSWR:	1:15:1 Max
Insertion Loss:	0.55 dB
Rejection:	90 dB Min @ 7.75 GHz 100 dB Min @ 8.75 GHz
Power:	700 W Max
Flanges:	Cover 112 Flat (Input) Cover 112 Grooved (Output)
Weight:	1.9 lbs (0.86 Kg)
Dimensions:	18.0" x 1.88" x 1.88" (457mm x 48mm x 48mm)
Finish:	Flat Black Lacquer
Weatherized for Outdoor Use	

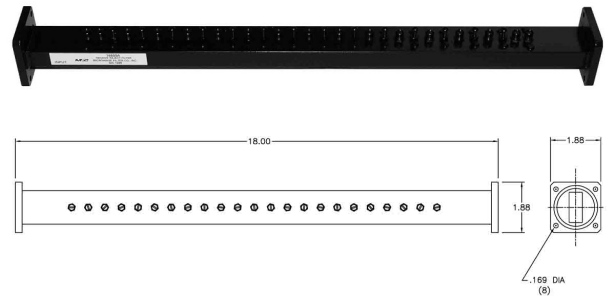

Flange Configurations

Model #	Input	Output
16605	CPR112G	CPR112F
16605A	WR112 Cover	WR112 Grooved
16605B	WR112 Cover	WR112 Cover
16605C	WR112 Cover	CPR112G

MICROWAVE FILTER CO., INC.
6743 KINNE STREET, E. SYRACUSE, NY 13057
E-Mail: mfcsales@microwavefilter.com

800-448-1666 • 315-438-4700
Web: www.microwavefilter.com