





Super-Extended Ku-Band Diplexer


Model 17540

This TX/RX diplexer incorporates highly-selective bandpass filter components to achieve *outstanding isolation* between uplink & downlink feeds in the wider, *super-extended* Ku-band.

- *Compact Size - Ideal for use in confined spaces.*
- *Also compatible with standard or extended Ku-band applications.*
- *Extremely low TX and RX signal loss.*
- *Other flange configurations are available upon request.*

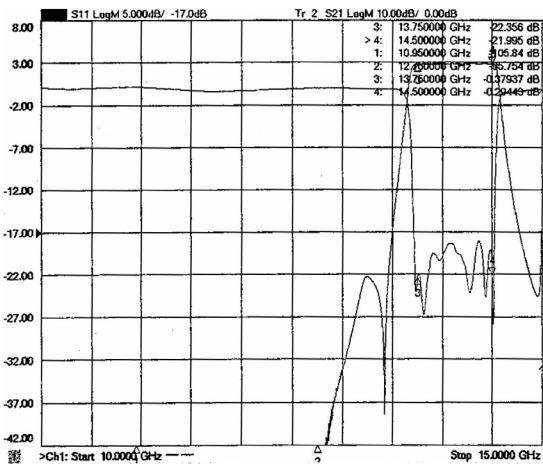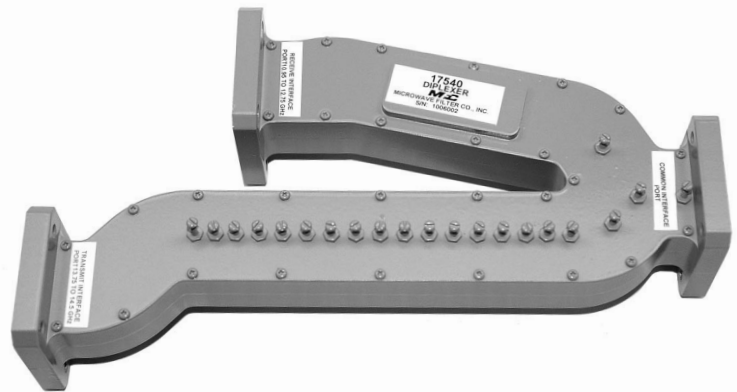


Tx Port to Common Port Response

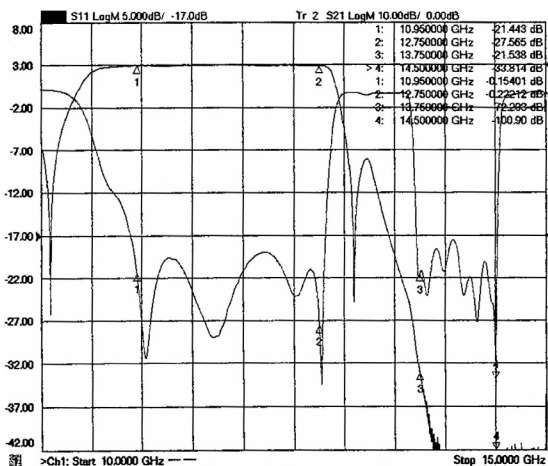

Rx Port to Common Port Response

Specifications:

Highband (Tx Port):	13.75 - 14.5 GHz (Uplink)
Insertion Loss:	0.4 dB Max from 13.75 - 14.5 GHz
Return Loss:	17 dB Typ from 13.75 - 14.5 GHz
Rejection:	100 dB Min / 55 dB Min from 10.95 - 12.75 GHz
Power Rating (CW):	30 Watts Max
Lowband (Rx Port):	10.95 - 12.75 GHz (Downlink)
Insertion Loss:	0.3 dB Max from 10.95 - 12.75 GHz
Return Loss:	17 dB Typ from 10.95 - 12.75 GHz
Rejection:	70 dB Min from 13.75 - 14.5 GHz
Flanges:	WR75 Cover
Weight:	0.7 lbs (0.32 Kg)
Dimensions:	7" x 3.9" x 1.5" (178mm x 99mm x 38mm)
Finish:	Gray Lacquer

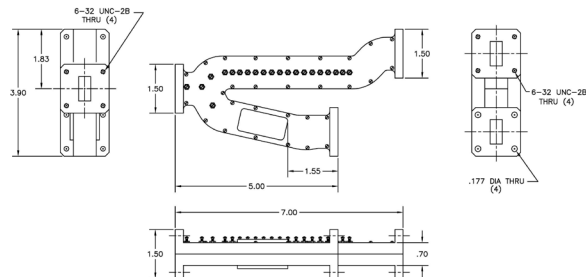

MICROWAVE FILTER CO., INC.
 6743 KINNE STREET, E. SYRACUSE, NY 13057
 E-Mail: mfcsales@microwavefilter.com

800-448-1666 • 315-438-4700
 Web: www.microwavefilter.com