

2 GHz TV Mobile Microlinks Bandpass Filter (Brazil)

Model 19205



This bandpass filter isolates this auxiliary TV band from potential interference caused by other sources of communication (e.g. – fixed wireless services).

Specifications:

| | |
|----------------------|---------------------------------|
| Passband | 2005 – 2080 MHz |
| Passband Loss | 1.0 dB Approx |
| Passband VSWR | 1.5:1 Approx |
| Passband Power | 5 Watts Max |
| Rejection | 25 dB Min @ 1980 MHz |
| | 25 dB Typ; 20 dB Min @ 2100 MHz |
| Impedance | 50 ohms |
| Connectors | N – male (Input) |
| | N – female (Output) |
| Operating Temp | +60 °F to +90 °F |

Indoor/Outdoor Use - Non-Weatherized*

* Requires placement in weatherized housing for outdoor use

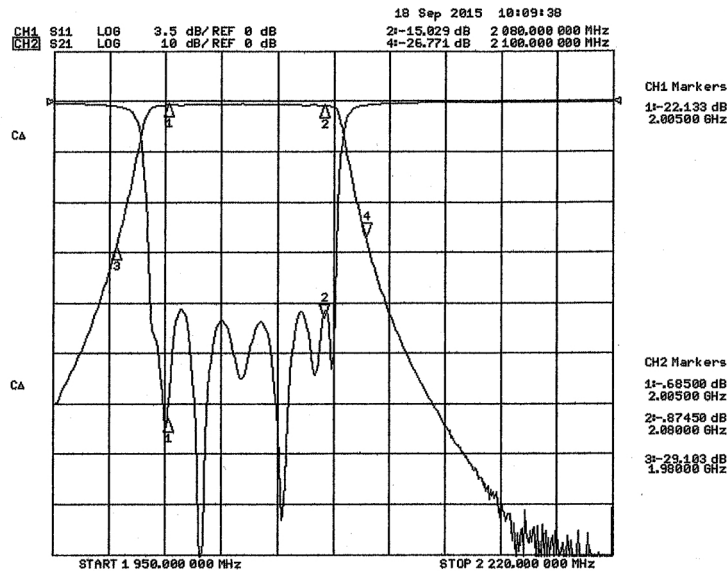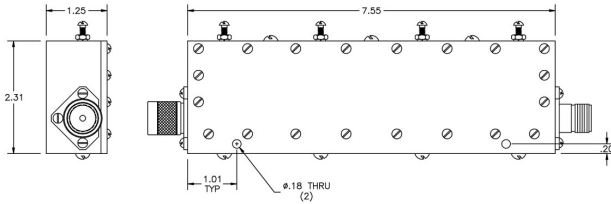

MICROWAVE FILTER COMPANY, INC.

6743 Kinne Street, East Syracuse, NY 13057 • Toll Free: 800-448-1666 or 888-206-6610

www.microwavefilter.com • email: mfcsales@microwavefilter.com • International: 315-438-4700