

2 GHz TV Mobile Microlinks Bandpass Filter (Brazil)

Model 19206



This bandpass filter isolates this auxiliary TV band from potential interference caused by other sources of communication (e.g. – fixed wireless services).

Specifications:

Passband	2200 – 2305 MHz
Passband Loss	1.5 dB Approx.
Passband VSWR	1.5:1 Max
Passband Power	5 Watts Max
Rejection	15 dB Min @ 2190 MHz
.....	35 dB Min @ 2325 MHz
Impedance	50 ohms
Connectors	N – male (Input)
.....	N – female (Output)
Operating Temp	+60 °F to +90 °F

Indoor/Outdoor Use - Non-Weatherized*

* Requires placement in weatherized housing for outdoor use

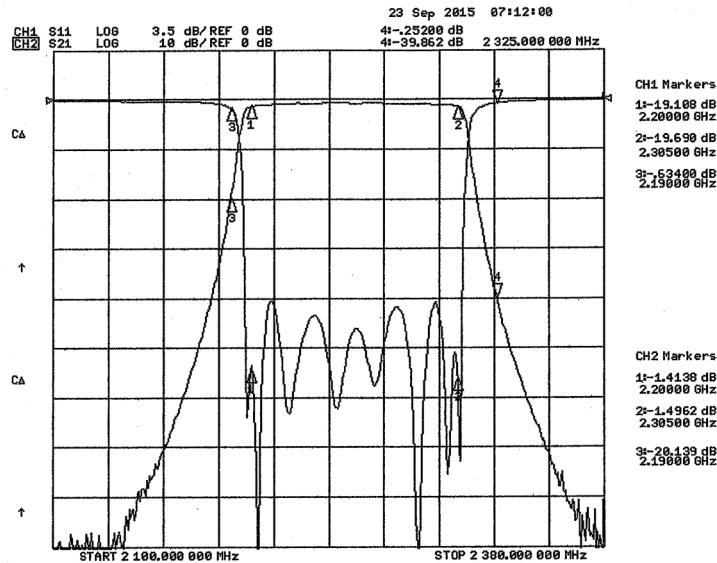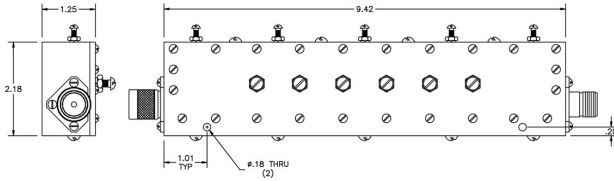

MICROWAVE FILTER COMPANY, INC.

6743 Kinne Street, East Syracuse, NY 13057 • Toll Free: 800-448-1666 or 888-206-6610

www.microwavefilter.com • email: mfcsales@microwavefilter.com • International: 315-438-4700