


2 GHz TV Mobile Microlinks Dual Band Bandpass Filter (Brazil)


Model 19294

This dual band bandpass filter isolates these auxiliary TV bands from potential interference caused by other sources of communication (e.g. – fixed wireless services).

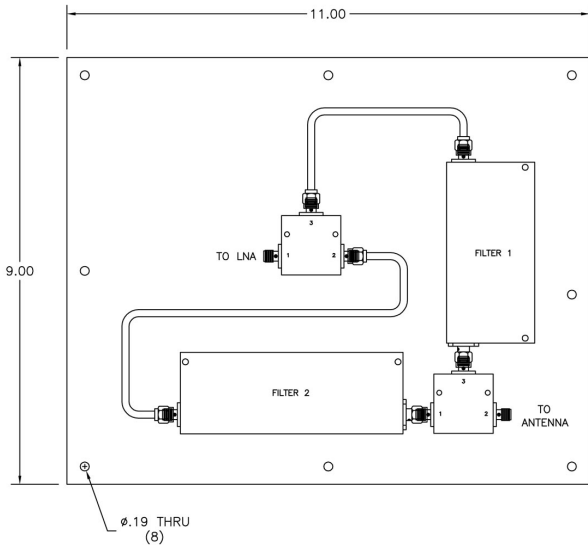

Specifications:

Passband #1	2005 – 2080 MHz
Passband #2	2200 – 2375 MHz
Passband #1 Insertion Loss	3.5 dB Approx
Passband #2 Insertion Loss	2.5 dB Approx
Passband VSWR	1.5:1 Max
Rejection	25 dBc Min @ 1980 MHz
.....	15 dBc Min @ 2100 MHz
.....	45 dBc Min @ 2150 MHz
.....	20 dBc Min @ 2400 MHz
Impedance	50 ohms
Connectors	SMA – Female

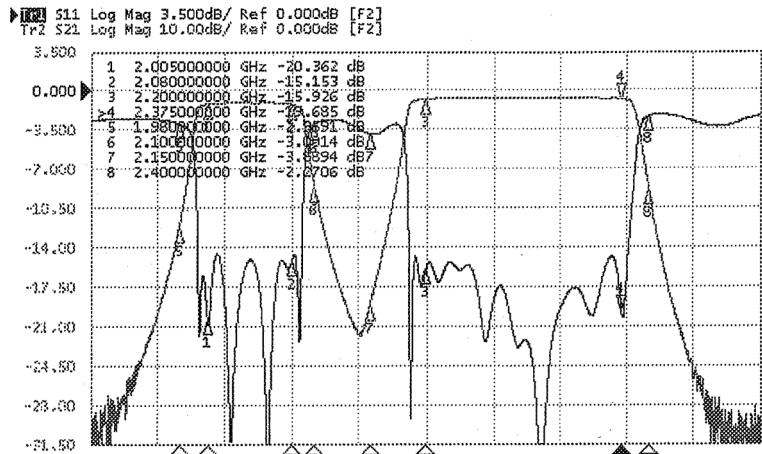

MICROWAVE FILTER COMPANY, INC.

6743 Kinne Street, East Syracuse, NY 13057 • Toll Free: 800-448-1666 or 888-206-6610

www.microwavefilter.com • email: mfcsales@microwavefilter.com • International: 315-438-4700