



L-Band Telephony/Telemetry Bandpass Filters

Series 18755


This versatile bandpass filter can be used for various telephony & telemetry applications.

Typical Applications:

- INMARSAT
- Iridium
- Thuraya
- Radio Astronomy

Specifications:

Passband:	1606 - 1681 MHz
Passband Loss:	< 0.5 dB Typ; 1 dB Max
Passband VSWR:	1.33:1 Max
Passband Power Rating:	200 Watts (CW) Max
Rejection:	75 dB Typ @ 1250 MHz 20 dB Typ @ 1559 MHz 10 dB Typ @ 1575.42 MHz 25 dB Typ @ 1750 MHz
Impedance:	50 ohms
Connectors:	N-female
Dimensions:	4.7" x 2.5" x 1.0" (119mm x 64mm x 25mm)

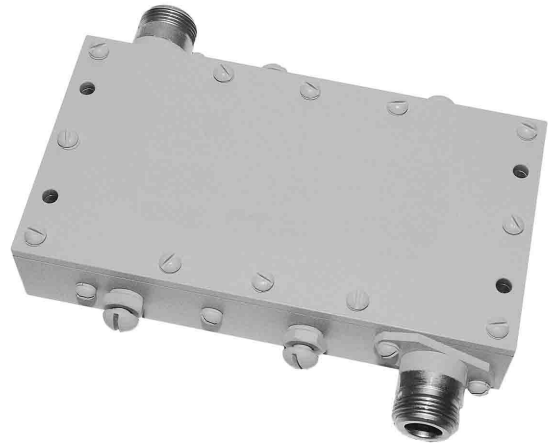

MICROWAVE FILTER CO., INC.
6743 KINNE STREET, E. SYRACUSE, NY 13057
E-Mail: mfcsales@microwavefilter.com

800-448-1666 • 315-438-4700
Web: www.microwavefilter.com