

THIS DRAWING IS A SOURCE CONTROL DRAWING AND IS PROPRIETARY TO MICROWAVE FILTER CO., INC. AND MAY NOT BE DUPLICATED OR DISTRIBUTED WITHOUT WRITTEN PERMISSION OF MICROWAVE FILTER CO., INC. THIS DRAWING ALSO DESCRIBES TRADE SECRETS AND IS THE EXCLUSIVE PROPERTY OF MICROWAVE FILTER CO., INC

REVISION						
L T R	П 0 Z	DATE	APPR'D			

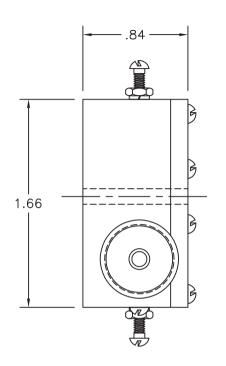

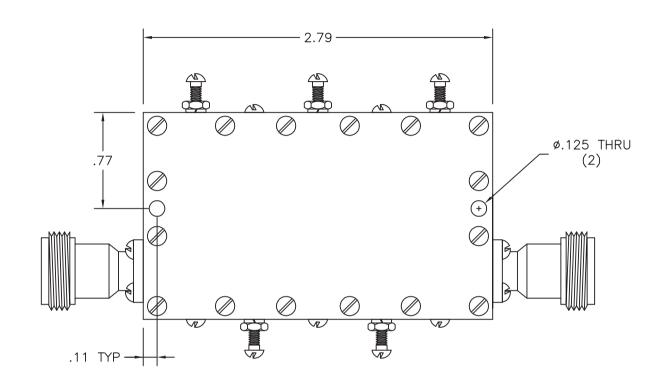

SPECIFICATIONS

CENTER FREQUENCY (Fo): 2550 MHz

INSERTION LOSS @ (Fo): 0.5 dB TYP, 1.0 dB MAX

V.S.W.R. @ (Fo):

RELATIVE 3 dB BANDWIDTH: 130 MHz TYP

REJECTION: 45 dB TYP @ 2400 MHz

30 dB MIN @ 2430 MHz

1.5:1 TYP

30 dB MIN @ 2670 MHz

IMPEDANCE: 50 OHMS
CONNECTORS: N-FEMALE

UNLESS SPECIFIED ALL TOLERANCES ±.025

ENVELOPE DRAWING

MICROWAVE FILTER CO. INC. 6743 KINNE ST. E. SYRACUSE, N.Y. 13057		FSCM27834		
DATE 9/24/13	TITLE			
DWN BY MW	FILTER, BANDPASS			
ENGINEER	DRAWING NO.		REV	
E.L.		18774		_