




4 Way Reactive Power Splitter

RD-6927-200-04NF

Specifications:

| | |
|-----------------------|---------------------------|
| Frequency Range: | 698-2700 MHz |
| Insertion Loss: | 6.6 dB Max |
| VSWR: | 1.25:1 Max |
| PIM: | -155 dBc Min @ 2 x 43 dBm |
| Power: | 200 Watts Avg |
| Impedance: | 50 Ohms |
| Connector: | N female |
| Operating Temp.Range: | -35°C to +65°C |
| Relative Humidity: | 5% - 95% |
| Ingress Protection: | IP65 |

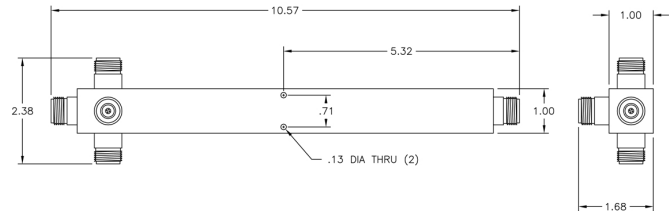

MICROWAVE FILTER CO., INC.
6743 KINNE STREET, E. SYRACUSE, NY 13057
E-Mail: mfcsales@microwavefilter.com

800-448-1666 • 315-438-4700
Web: www.microwavefilter.com