




Directional Coupler

DC-6927-300-06F4310

Specifications:

Frequency Range:	698-2700 MHz
Coupling:	6 dB, $\pm .8$ dB
Isolation:	26 dB Min
Insertion Loss:	1.75 dB Max
VSWR:	1.25:1 Max
PIM:	-155 dBc Min @ 2 x 43 dBm
Power:	300 Watts
Impedance:	50 Ohms
Connector:	4.3/10 female
Operating Temp. Range:	-20°C to +70°C
Relative Humidity:	5% - 95%
Ingress Protection:	IP65

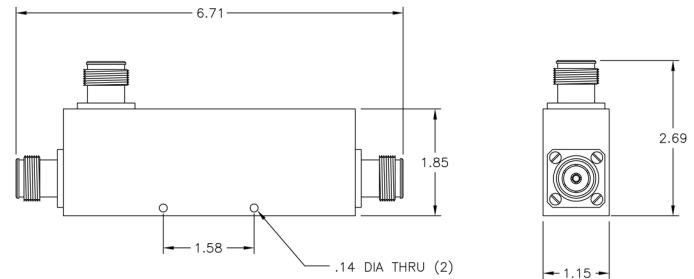

MICROWAVE FILTER CO., INC.
6743 KINNE STREET, E. SYRACUSE, NY 13057
E-Mail: mfcsales@microwavefilter.com

800-448-1666 • 315-438-4700
Web: www.microwavefilter.com