

# DTV-VHF/UHF Bandpass Filter

This bandpass filter allows for clean reception of the DTV-VHF high band and the DTV-UHF band by eliminating potential sources of interference operating below that VHF band and above the UHF band.





## Model 19520

Features:

- Suppresses 700 MHz (downlink) transmit bands 12, 13, 14 and 17
- Allows for clean reception of DTV-UHF channels 14-50 and all DTV-VHF-High band channels 7-13
- Also suppresses GSM 850 & GSM 900 bands

## Specifications:

|                           |  |
|---------------------------|--|
| Passband: .....           | 174 - 698 MHz  |
| Passband Loss: .....      | 3 dB Typ @ Passband Edges<br>1-2 dB Typ in Remainder of Passband |
| Stopbands: .....          | 5 - 163 MHz and 732 - 1000 MHz                                   |
| Stopband Attenuation: ... | 50 dB Typ  |
| Impedance: .....          | 75 ohms  |
| Connectors: .....         | F-female   |
| Size: .....               | 7.75" x 1.50" x 1.19" Approx                                     |

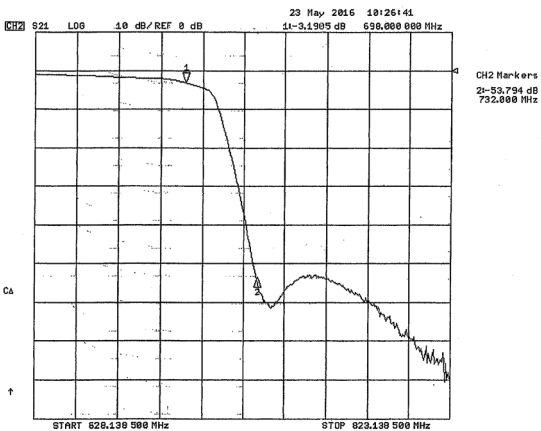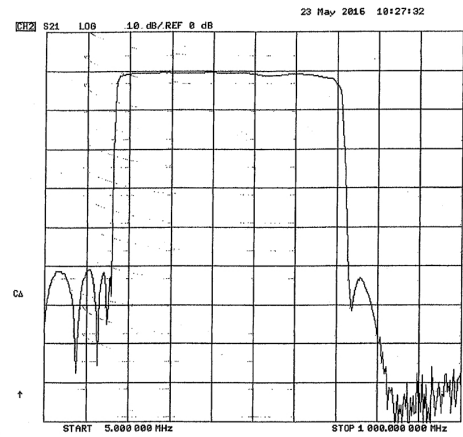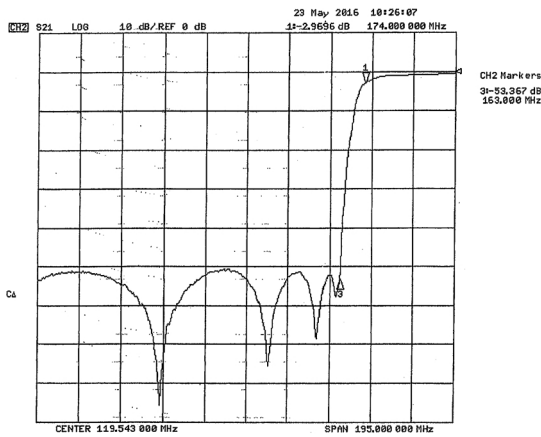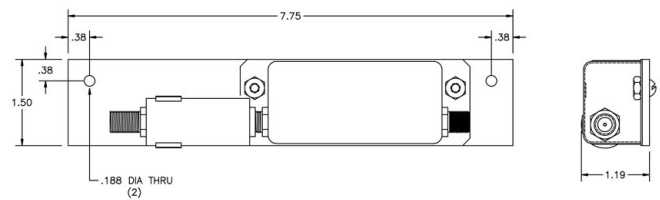

**MICROWAVE FILTER COMPANY, INC.**

6743 Kinne Street, East Syracuse, NY 13057 • Toll Free: 800-448-1666 or 888-206-6610

www.microwavefilter.com • email: mfcsales@microwavefilter.com • International: 315-438-4700