


# Interference Filters For MMDS

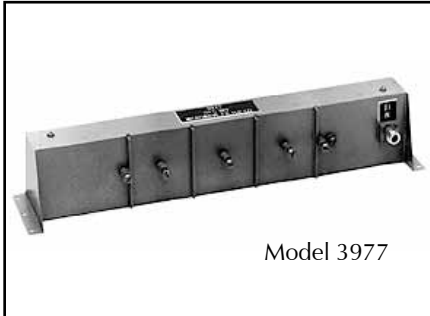

Model 3977


## Specifications:

Frequency Range .....	2496 to 2690 MHz
Insertion Loss .....	0.5 dB Max
Channel Bandwidth .....	6 MHz
Selectivity .....	20 dB Min. $\pm$ 9 MHz from center
Return Loss .....	18 dB Min
Power Rating .....	500 watts Max
Connectors .....	50 ohm N Female

## Model 3977

Single channel BRS-EBS channel filters remove spurious signals from the output of single channel transmitters.

\* Custom configurations available upon request.

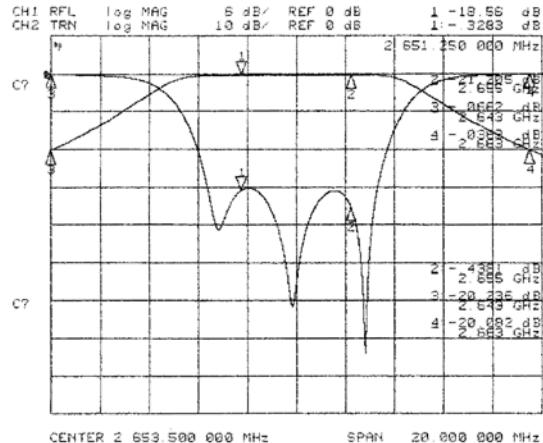

**MICROWAVE FILTER CO., INC.**  
 6743 KINNE STREET, E. SYRACUSE, NY 13057  
 E-Mail: [mfcsales@microwavefilter.com](mailto:mfcsales@microwavefilter.com)

800-448-1666 • 315-438-4700  
 Web: [www.microwavefilter.com](http://www.microwavefilter.com)