




# 700 MHz/Upper C & D - Full Block/Bandpass Filter

## Model 18608

This filter passes the Upper C & D (full) block while rejecting all DTV-UHF band and GSM 850 band transmissions.

- *Rejects all signals below the 700 MHz band*
- *Alternate connectors available upon request*

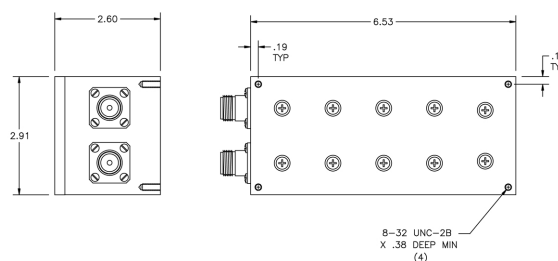

### Specifications:

Passband:	740 - 800 MHz
Passband Insertion Loss:	1 dB Max
Passband Return Loss:	20 dB Min
Stopbands:	DC - 696 MHz 806 - 896 MHz
Stopband Attenuation:	30 dB Min
Impedance:	50 Ohms
Connectors:	See chart
Dimensions:	6.53" x 2.91" x 2.60" (166mm x 74mm x 66mm)

Model #	Configuration
18608	N Female Connectors
18608S	SMA Female Connectors

**MICROWAVE FILTER CO., INC.**  
 6743 KINNE STREET, E. SYRACUSE, NY 13057  
 E-Mail: [mfcsales@microwavefilter.com](mailto:mfcsales@microwavefilter.com)

800-448-1666 • 315-438-4700  
 Web: [www.microwavefilter.com](http://www.microwavefilter.com)